

Highland Rd - Burbank Dr Sewer Area Upgrades

City-Parish # 08-FM-ST-0023

Advertise for Bids: **1st Quarter 2010**
 Anticipated Project End: **1st Quarter 2014**

This project includes the upsizing of force main in an area that extends north to the intersection of Jefferson Highway and Tiger Bend Road and continues south to the Staring Lane extension and Burbank Drive intersection. The upgrades are designed to alleviate chronic SSOs at the pump station and increase capacity.




Design of the Highland Road – Burbank Drive project includes upsizing 42,590 linear feet of various sizes of forcemain.



The force main at Booster Pump Station 514 (located at Burbank drive intersection) will be increased from 48" in diameter to 54" in diameter to accommodate flow.



A total of 40,910 linear feet of 54-inch force main will be installed in the project area.

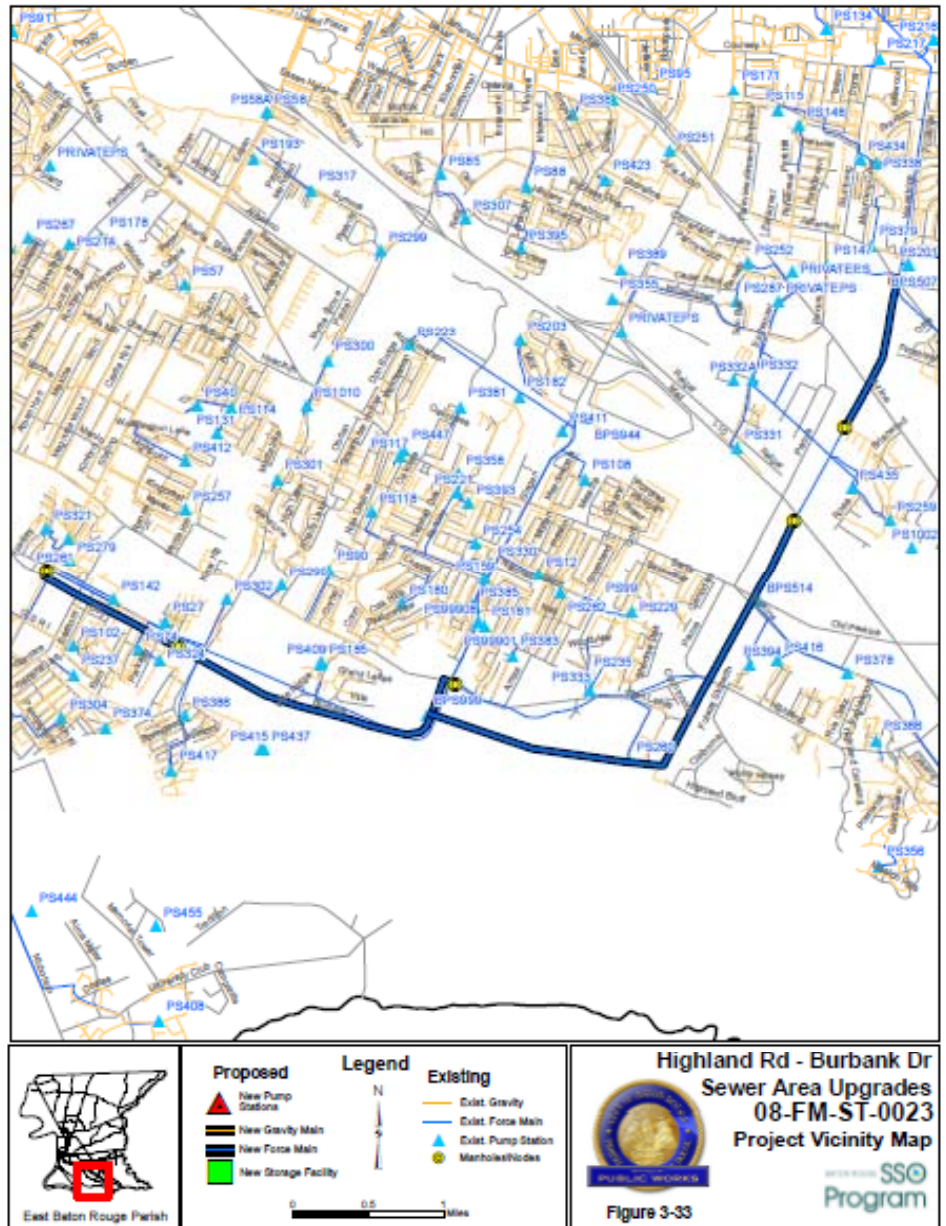

Highland Rd - Burbank Dr Sewer Area Upgrades Project Facts

FORCE MAIN IMPROVEMENTS:

- 40,910 linear feet, 24-60 in. diameter

Design Consultant:
 GOTECH, Inc.

Construction Contractor:
 RACON, Inc.

Estimated Construction Cost: \$22.2 M