

Nicholson Dr - Highland Rd - Perkins Rd Sewer Area Upgrades (Phase B)


City-Parish # 09-FM-MS-047B

Advertise for Bids: **2nd Quarter 2013**
 Anticipated Project End: **1st Quarter 2014**

This project includes the upsizing of force main and gravity mains in an area that extends north to the intersection of Jefferson Hwy and Tiger Bend Road and continues south to the SWWTP. The upgrades are designed to alleviate chronic SSOs at the pump stations and increase gravity main capacity.



Flow measurements are taken throughout the collection system to determine the correct pump station upgrade size.

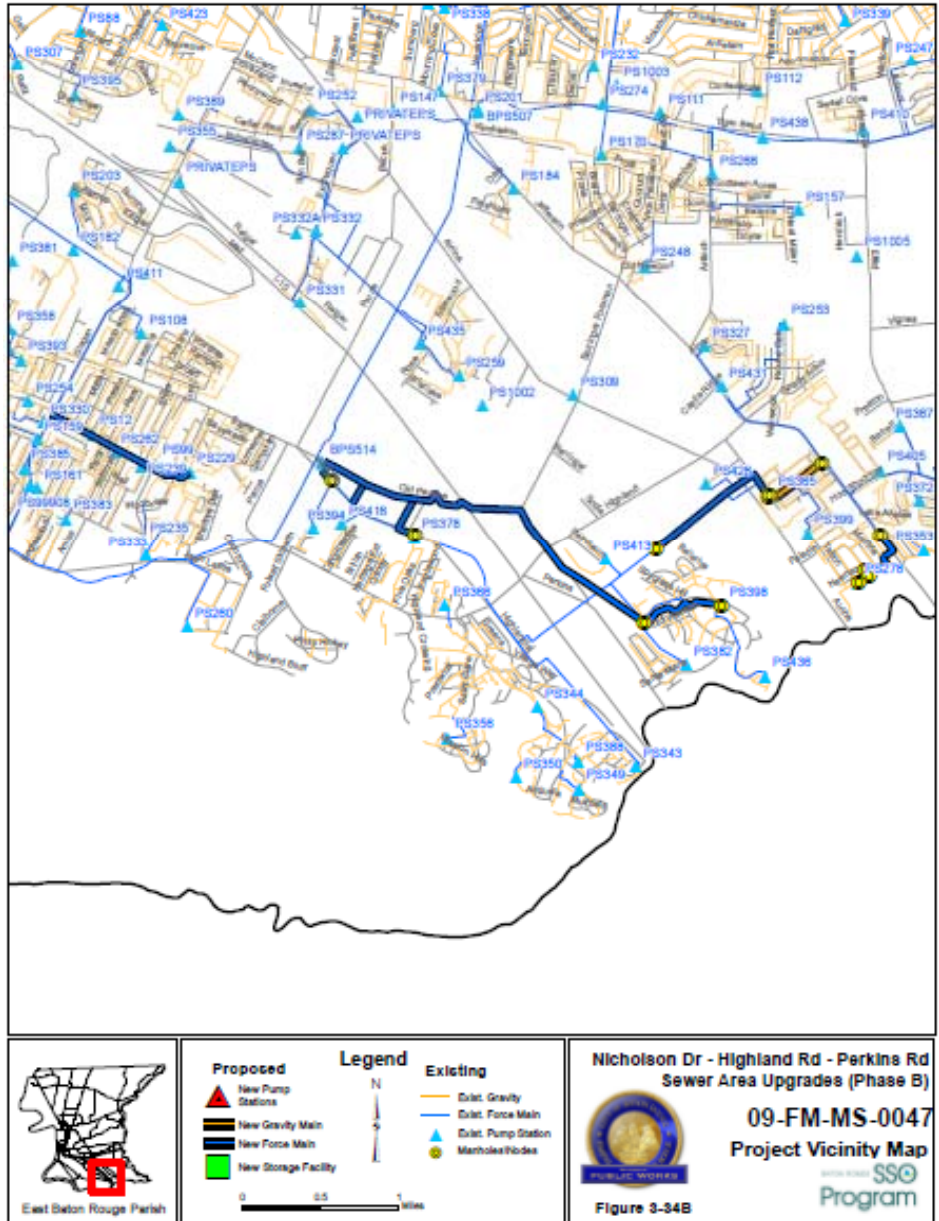

Nicholson Dr - Highland Rd - Perkins Rd Sewer Area Upgrades (Phase B) Project Facts:

FORCE MAIN IMPROVEMENTS:

- 24,220 linear feet, 3-24 in. diameter

Design Consultant:

Buchart-Horn

GRAVITY MAIN IMPROVEMENTS:

- 3,420 linear feet, 8-12 in. diameter

Construction Contractor:

Garney Construction

Estimated Construction Cost: \$8.0 M