
## Airline Hwy Pipeline Project City-Parish #10-GS-MS-0007

## Project Start: 1<sup>st</sup> Quarter 2009 2nd Quarter 2014 Advertise for Bids: Anticipated Project End: 1<sup>st</sup> Quarter 2017

The Airline Highway Pipeline Projects include gravity sewer upgrades, and construction of new force main segments. These pipelines will alleviate SSOs in the vicinity of the associated pump stations, and the upstream basins.




Collection system pipe sizes range from less one foot to over four feet in diameter for this project.



Flow measurements are taken throughout the collection system to determine the correct pipeline size.



Approximately 5,600 linear feet of new 48-inch forcemain will be constructed in the project area.

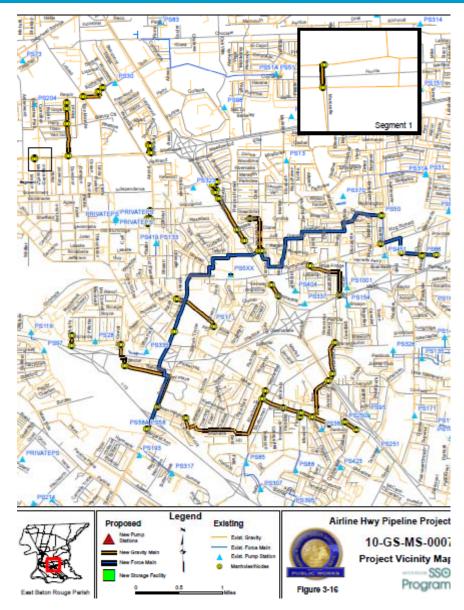

## **Airline Hwy Pipeline Projects Facts**

**GRAVITY MAIN IMPROVEMENTS:** • 49,120 linear feet, 8-42 in.

FORCE MAIN IMPROVEMENTS: • 29,280 linear feet, 12-48 in.

**Design Consultant:** ABMB Eng.

**Construction Contractor:** To be determined

Estimated Construction Cost: \$37.7 M