

O'Neal Ln Sewer Area Upgrades (Group B)

City-Parish # 10-FM-MS-008B

Advertise for Bids: **4th Quarter 2013**
 Anticipated Project End: **2nd Quarter 2015**


The project involves upsizing of gravity main to alleviate chronic SSOs at pump stations and increase the gravity main capacity. The force main upgrades will be developed to alleviate chronic SSOs at the pump stations and increase the capacity.



Collection system pipe sizes range from less than a foot to over six feet in diameter.



Flow measurements are taken throughout the collection system to determine the correct pipeline size.

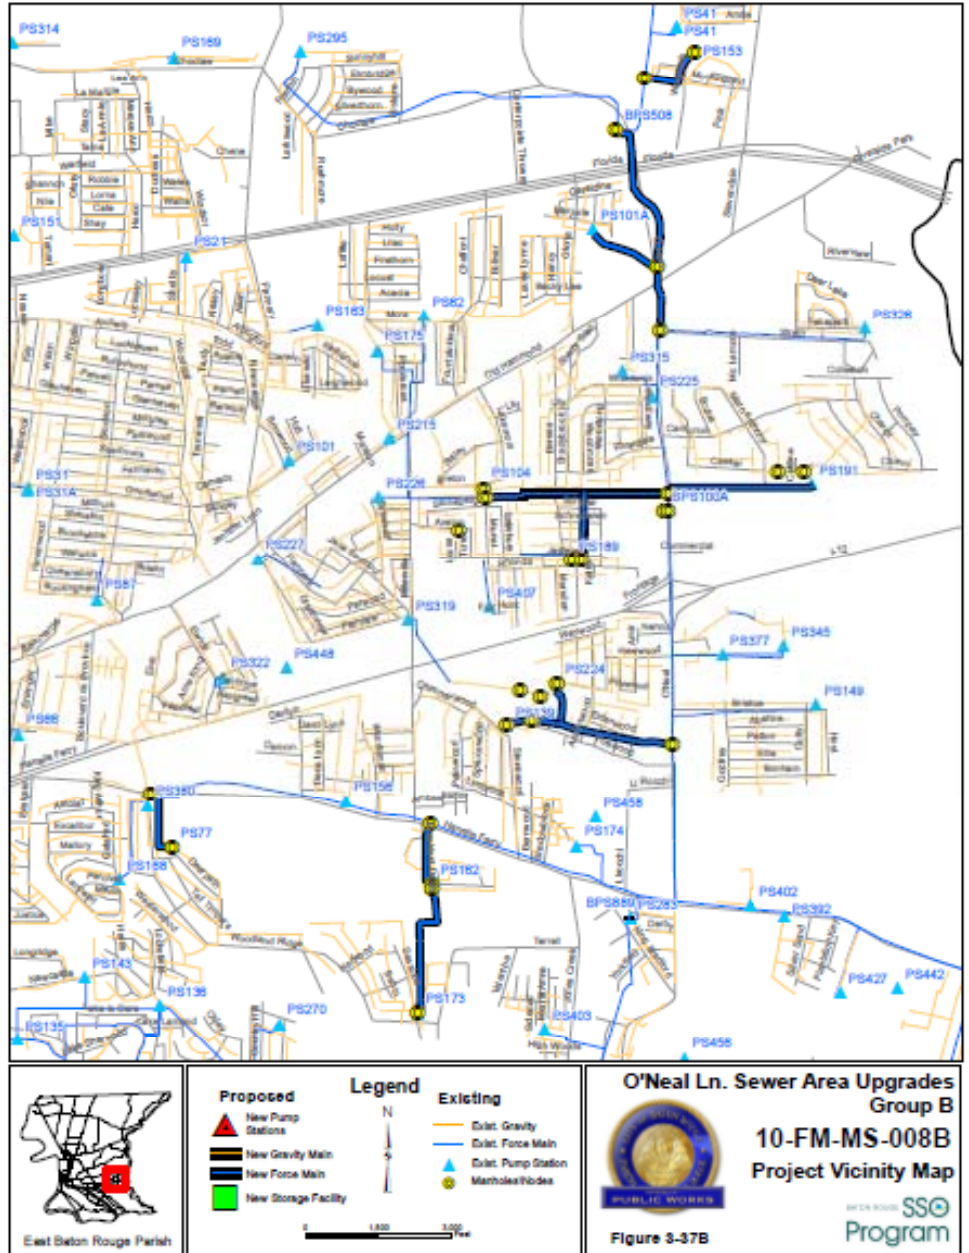

O'Neal Ln Sewer Area Upgrades (Group B) Project Facts

FORCEMAIN IMPROVEMENTS:

- 26,380 linear feet, 4-24 in. diameter

Design Consultant:
URS Corporation

Construction Contractor:
To be determined

Estimated Construction Cost: \$6.6 M