

Plank Rd - Kleinpeter Rd Sewer Area Upgrades

City-Parish #09-GS-UF-0028

Advertise for Bids: **4th Quarter 2012**
 Anticipated Project End: **2nd Quarter 2014**

The purpose of this project is to upsize approximately 16,000 linear feet of gravity sewers upstream of PS45, PS127, PS44 and PS244 as well as 7,800 linear feet of force mains exiting PS38, PS244 and PS63 to alleviate chronic SSOs in the gravity sewer.




Approximately 16,000 linear feet of increased gravity sewer pipe will be constructed in the Plank Road – Kleinpeter Road project.



Sixty-five linear feet of 42-inch forcemain will be constructed in the project area.



A total of 23,740 linear feet of gravity and force main will be constructed in the project area.

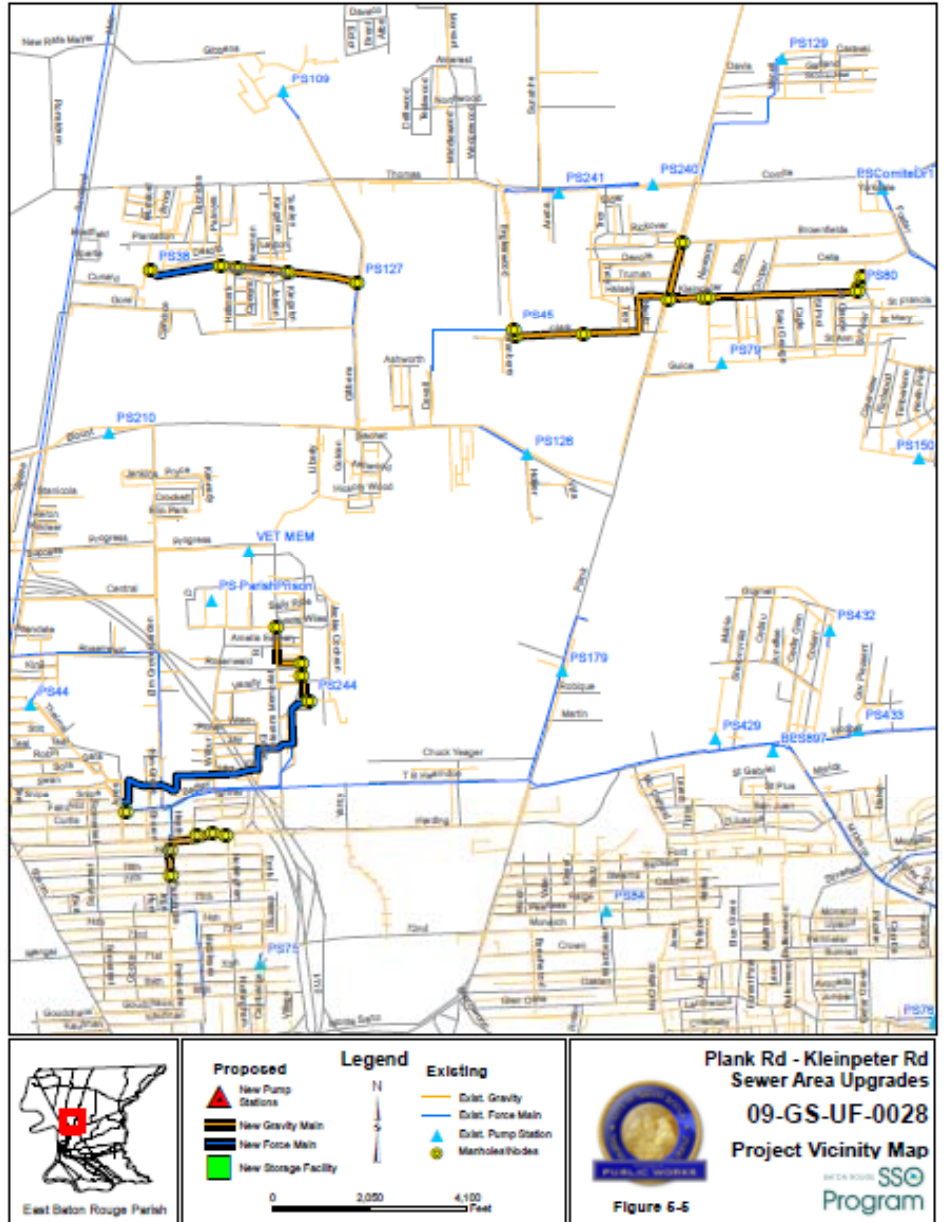

Plank Rd - Kleinpeter Rd Sewer Area Upgrades Project Facts

FORCEMAIN IMPROVEMENTS:

- 7,800 linear feet, 8-12 in. diameter

Design Consultant:

Forte & Tablada

GRAVITY MAIN IMPROVEMENTS:

- 15,940 linear feet, 8-42 in. diameter

Construction Contractor:

JB James Construction

Estimated Construction Cost: \$9.3 M