

Sharp Rd - Florida Blvd Area Rehabilitation Project

City-Parish #09-AR-BD-0013

Advertisement for Bid: **2nd Quarter 2010**
 Project End: **3rd Quarter 2012**


Rehabilitation of the sewer collection system is a comprehensive physical process that begins with cleaning and inspection of sewer pipes and manholes. Typical rehabilitation repairs include pipe and manhole replacement and trenchless technologies that minimize above ground disturbances, such as cured-in-place pipe liners.



One of the first steps in rehabilitation includes a physical inspection of manholes and pipes to identify blockages.



Simply cleaning the pipes and manholes in preparation for the physical inspection removes blockages, debris and roots.

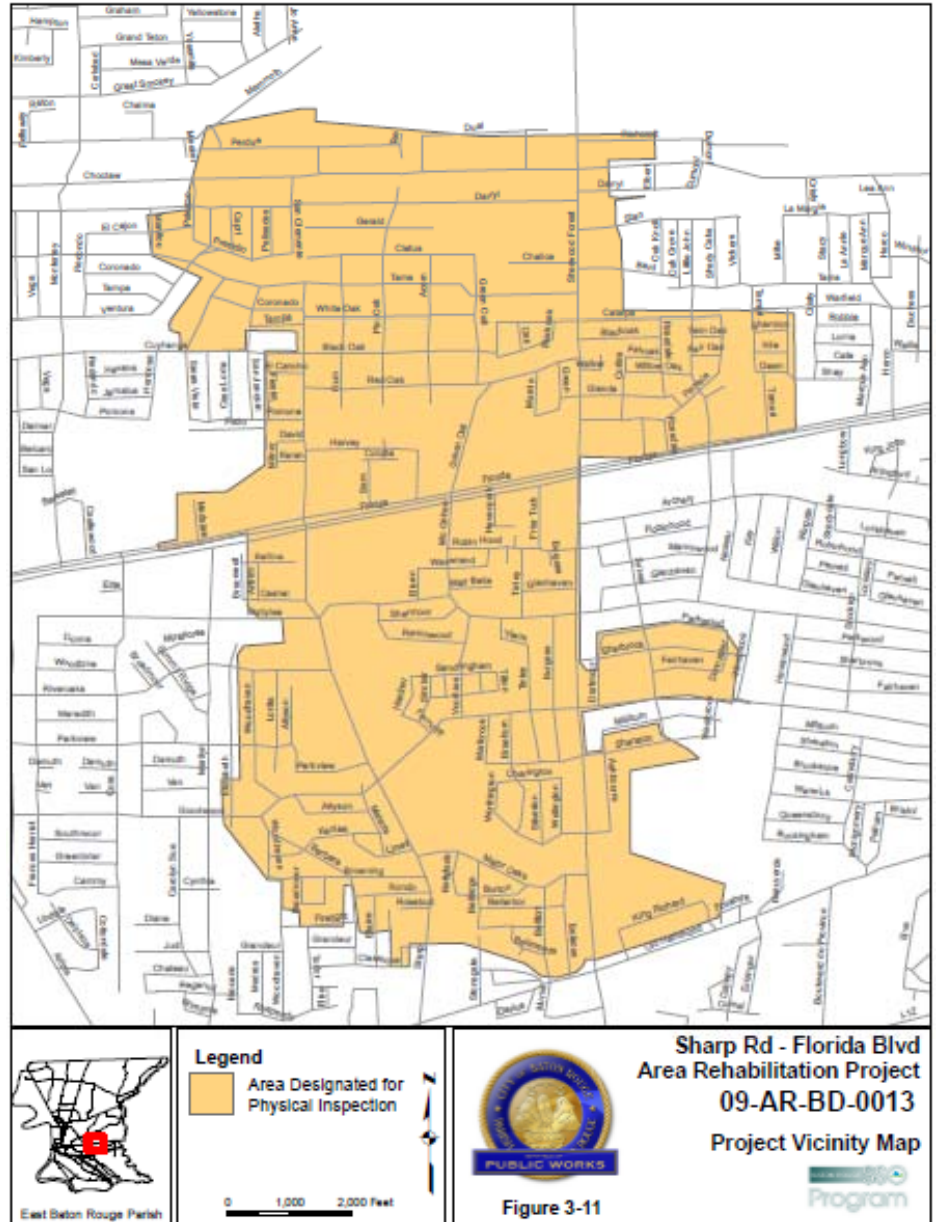

Sharp Rd - Florida Blvd Area Rehabilitation Project Facts

For this project:

- Approximately 274,475 linear feet of pipeline were inspected and rehabilitated
- Approximately 1,154 manholes were rehabilitated or replaced

Design Consultant:

Rehab Program Mgmt Team.

Construction Contractor:

Reynolds Inc.

Construction Cost: \$17.5 M