

# Sherwood Forest Blvd - Goodwood Blvd Sewer Area Upgrades

City-Parish # 11-FM-MS-0005

Project Start: **1<sup>st</sup> Quarter 2011**  
 Advertisement for Bids: **2<sup>nd</sup> Quarter 2014**  
 Anticipated Project End: **3<sup>rd</sup> Quarter 2016**


This project includes the upgrade of gravity sewers upstream of PS13, PS50, PS21, PS31, and PS101 to alleviate SSOs.



Collection system pipe sizes range from less than a foot to over six feet in diameter.



Flow measurements are taken throughout the collection system to determine the correct pipeline size.

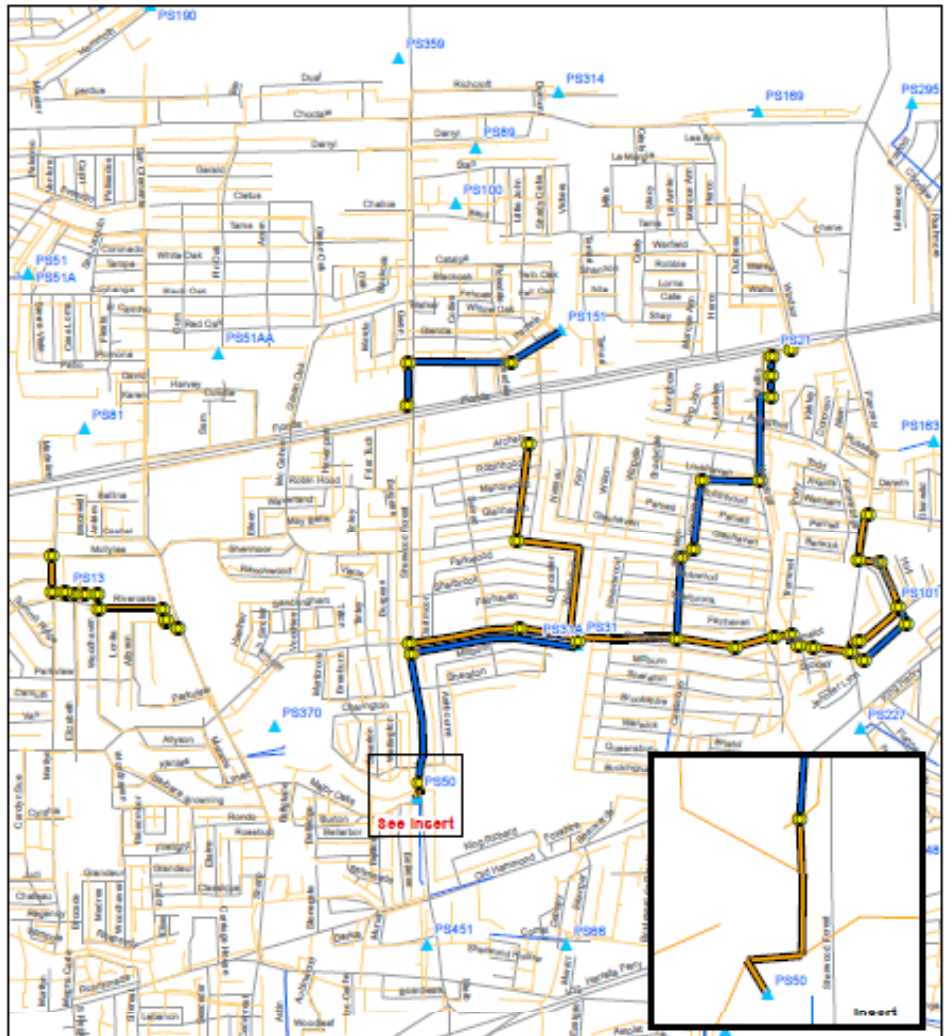

## Sherwood Forest Blvd - Goodwood Blvd Sewer Area Upgrades Project Facts

### GRAVITY MAIN IMPROVEMENTS:

- 14,760 linear feet, 8-36 in. diameter

Design Consultant:  
Forte & Tablada

### FORCEMAIN IMPROVEMENTS:

- 15,780 linear feet, 8-18 in. diameter

Construction Contractor:  
TBD

**Estimated Construction Cost: \$12.0 M**