

# Sullivan Road – Lovett Road – Wax Road Sewer Area Upgrades

City-Parish # 07-PS-BD-0018

Advertise for Bids: **1<sup>st</sup> Quarter 2009**  
 Project End: **2<sup>nd</sup> Quarter 2011**

The purpose of this project is to replace PS230, PS282, and PS187 to alleviate SSOs at and near the pump stations. This project also includes the upsizing of the force mains from the three pump stations as well as the gravity sewer that feeds PS230.




Pump Station #230, located at Morgan Meadow Avenue, near the intersection of Shoe Creek Drive, is being upgraded.



Pump Station #282, located on Regent Avenue, near the intersection of Trendale Drive, is being upgraded.



Pump Station #187, located on Clear Oak Avenue, near the intersection of Oak Meadow Drive, is being upgraded.

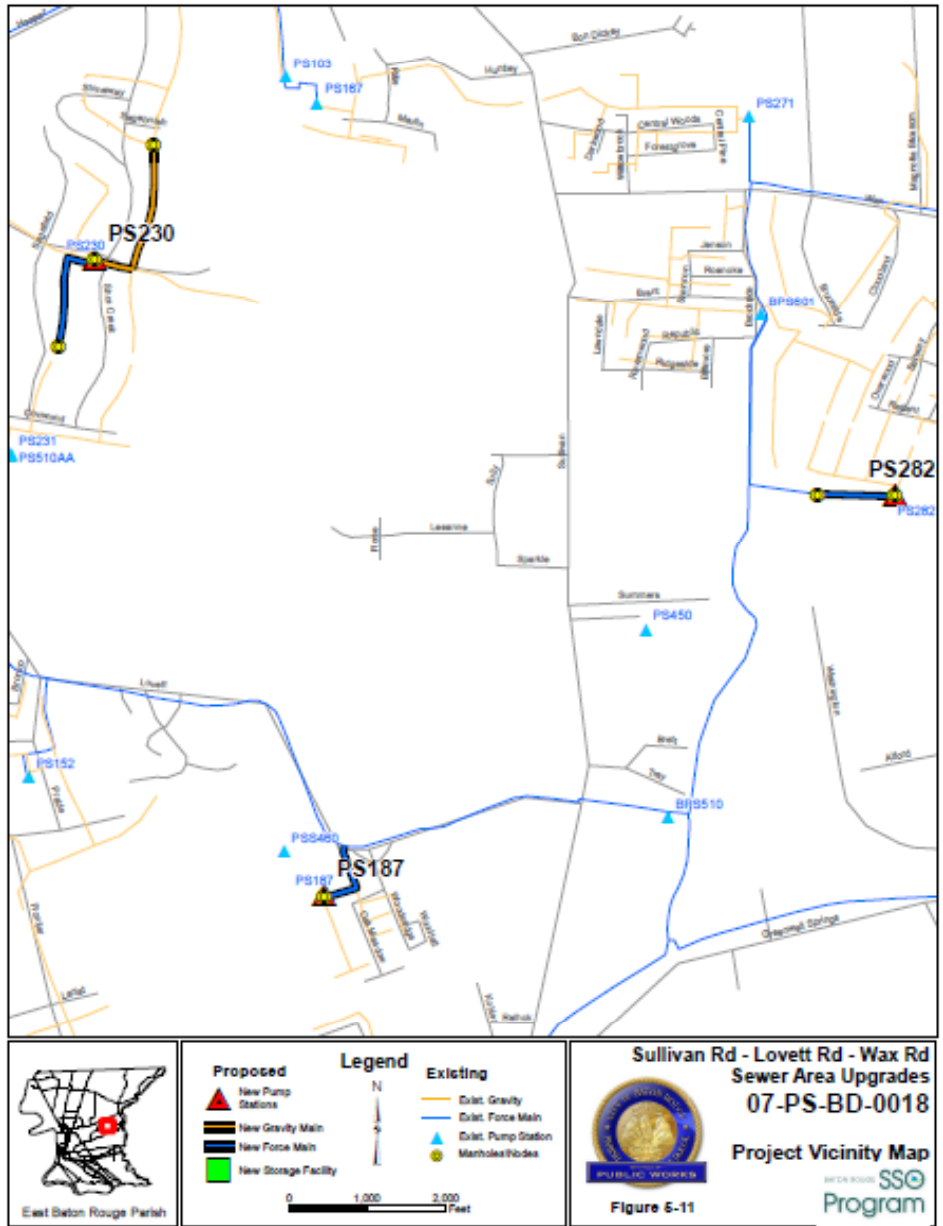

## Sullivan Rd – Lovett Rd – Wax Rd Project Facts

### FORCEMAIN IMPROVEMENTS:

- 4,660 linear feet, 6-8 in. diameter

### Design Consultant:

Hartman Engineering

### PUMP STATION UPGRADES:

- 3 pump stations, peak wet weather capacity ranging between 380-1,360 gallons per minute

### Construction Contractor:

Don M. Barron Contractor

### GRAVITY MAIN IMPROVEMENTS:

- 2,120 linear feet, 12 in. diameter

**Construction Cost: \$2.1 M**